


10B214 Neutral

SKU: 200KHD106Z14

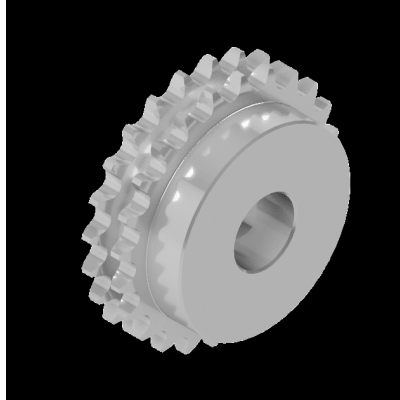

Specificaties

Kettingsontwerp	Duplex
Oppervlaktebehandeling	No
Materiaal	C45
Spoed (inch)	5/8"
Spoed (mm)	15.875
ISO-standaardmaat	ISO 606
designation	10B214
Boring diameter (mm)	
Eenheden	pc
numberOfTeethZ	14
toothWidthMM	25.5
pilotBoreDiameterMM	16
pitchCircleDiameterMM	71.34
tipCircleDiameterMM	78.2
Geharde tanden	Ja
Gewicht (kg)	0.82
weldedHub	Nee
taperBushSize	
hubDiamDnMM	54
lengthInclHubLnMM	40

toothWidthb1MM	9
SprocketType	Standard Induction hardened teeth
BEAArticleNumber	192350014
ISOstandardSize2	10B
brandType(extraAttributeForNeutralIdentifier)	Extended
Merk	Neutral
Materiaal	C45
Spoed (inch)	5/8"
Spoed (mm)	15.875
Boring diameter (mm)	
Geharde tanden	Ja
Gewicht (kg)	0.82

Beschrijving

ISO 606 Duplex Z 14, Standard Induction hardened teeth Neutral Sprockets

Product URL

<https://aandrijftechniek.nl/product/10b214-neutral-2/>