


10B322 Neutral

SKU: 200KWTR106Z22

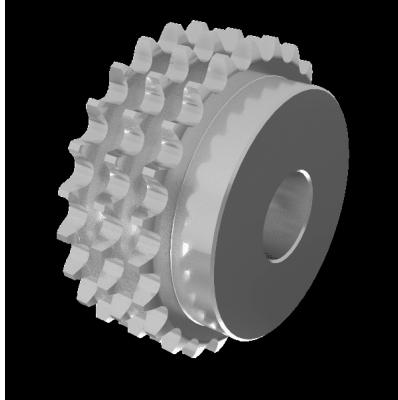

Specificaties

Kettingsontwerp	Triplex
Oppervlaktebehandeling	No
Materiaal	C45
Spoed (inch)	5/8"
Spoed (mm)	15.875
ISO-standaardmaat	10B
designation	10B322
Boring diameter (mm)	
Eenheden	pc
numberOfTeethZ	22
toothWidthMM	42.1
pilotBoreDiameterMM	20
pitchCircleDiameterMM	111.55
tipCircleDiameterMM	118.4
Geharde tanden	Nee
Gewicht (kg)	3.48
weldedHub	Nee
taperBushSize	
hubDiamDnMM	90
lengthInclHubLnMM	60

toothWidthb1MM	9
SprocketType	Standard
BEAArticleNumber	103350022
ISOstandardSize2	ISO 606
brandType(extraAttributeForNeutralIdentifier)	Extended
Merk	Neutral
Materiaal	C45
Spoed (inch)	5/8"
Spoed (mm)	15.875
Boring diameter (mm)	
Geharde tanden	Nee
Gewicht (kg)	3.48

Beschrijving

10B Triplex Z 22, Standard Neutral Sprockets

Product URL

<https://aandrijftechniek.nl/product/10b322-neutral/>