


## 12B230 Neutral

SKU: 200KWD127Z30

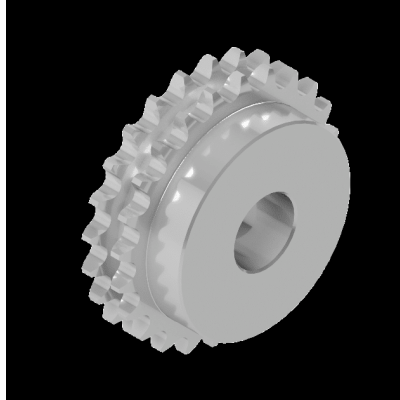

### Specificaties

<b>Kettingsontwerp</b>	Duplex
<b>Oppervlaktebehandeling</b>	No
<b>Materiaal</b>	C45
<b>Spoed (inch)</b>	3/4"
<b>Spoed (mm)</b>	19.05
<b>ISO-standaardmaat</b>	12B
<b>designation</b>	12B230
<b>Boring diameter (mm)</b>	
<b>Eenheden</b>	pc
<b>numberOfTeethZ</b>	30
<b>toothWidthMM</b>	30.3
<b>pilotBoreDiameterMM</b>	20
<b>pitchCircleDiameterMM</b>	182.25
<b>tipCircleDiameterMM</b>	190.4
<b>Geharde tanden</b>	Nee
<b>Gewicht (kg)</b>	7.19
<b>weldedHub</b>	Nee
<b>taperBushSize</b>	
<b>hubDiamDnMM</b>	120
<b>lengthInclHubLnMM</b>	50

<b>toothWidthb1MM</b>	10.8
<b>SprocketType</b>	Standard
<b>BEAArticleNumber</b>	102360030
<b>ISOstandardSize2</b>	ISO 606
<b>brandType(extraAttributeForNeutralIdentifier)</b>	Extended
<b>Merk</b>	Neutral
<b>Materiaal</b>	C45
<b>Spoed (inch)</b>	3/4"
<b>Spoed (mm)</b>	19.05
<b>Boring diameter (mm)</b>	
<b>Geharde tanden</b>	Nee
<b>Gewicht (kg)</b>	7.19

## Beschrijving

12B Duplex Z 30, Standard Neutral Sprockets

## Product URL

<https://aandrijftechniek.nl/product/12b230-neutral/>