


## 16B314 Neutral

SKU: 200KWTR1611Z14

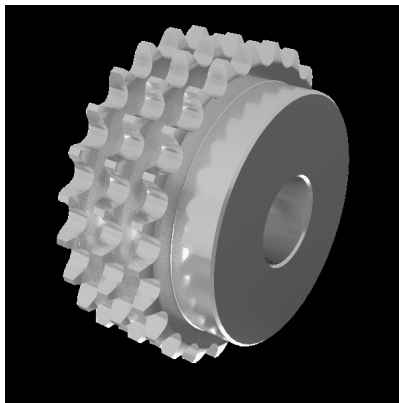

## Specificaties

|                        |         |
|------------------------|---------|
| Kettingsontwerp        | Triplex |
| Oppervlaktebehandeling | No      |
| Materiaal              | C45     |
| Spoed (inch)           | 1"      |
| Spoed (mm)             | 25.4    |
| ISO-standaardmaat      | 16B     |
| designation            | 16B314  |
| Boring diameter (mm)   |         |
| Eenheden               | pc      |
| numberOfTeethZ         | 14      |
| toothWidthMM           | 79.6    |
| pilotBoreDiameterMM    | 25      |
| pitchCircleDiameterMM  | 114.15  |
| tipCircleDiameterMM    | 125.7   |
| Geharde tanden         | Nee     |
| Gewicht (kg)           | 5.37    |
| weldedHub              | Nee     |
| taperBushSize          |         |
| hubDiamDnMM            | 88      |
| lengthInclHubLnMM      | 100     |

|                                               |           |
|-----------------------------------------------|-----------|
| toothWidthb1MM                                | 15.8      |
| SprocketType                                  | Standard  |
| BEAArticleNumber                              | 103380014 |
| ISOstandardSize2                              | ISO 606   |
| brandType(extraAttributeForNeutralIdentifier) | Extended  |
| Merk                                          | Neutral   |
| Materiaal                                     | C45       |
| Spoed (inch)                                  | 1"        |
| Spoed (mm)                                    | 25.4      |
| Boring diameter (mm)                          |           |
| Geharde tanden                                | Nee       |
| Gewicht (kg)                                  | 5.37      |

# Beschrijving

16B Triplex Z 14, Standard Neutral Sprockets

# Product URL

<https://aandrijftechniek.nl/product/16b314-neutral/>