


## 16B325 Neutral

SKU: 200KWTR1611Z25

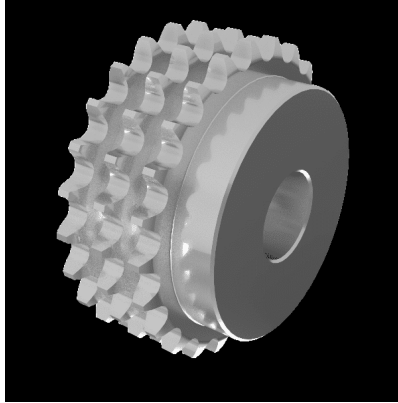

## Specificaties

|                        |         |
|------------------------|---------|
| Kettingsontwerp        | Triplex |
| Oppervlaktebehandeling | No      |
| Materiaal              | C45     |
| Spoed (inch)           | 1"      |
| Spoed (mm)             | 25.4    |
| ISO-standaardmaat      | 16B     |
| designation            | 16B325  |
| Boring diameter (mm)   |         |
| Eenheden               | pc      |
| numberOfTeethZ         | 25      |
| toothWidthMM           | 79.6    |
| pilotBoreDiameterMM    | 25      |
| pitchCircleDiameterMM  | 202.66  |
| tipCircleDiameterMM    | 214.2   |
| Geharde tanden         | Nee     |
| Gewicht (kg)           | 18.99   |
| weldedHub              | Nee     |
| taperBushSize          |         |
| hubDiamDnMM            | 130     |
| lengthInclHubLnMM      | 100     |

|                                               |           |
|-----------------------------------------------|-----------|
| toothWidthb1MM                                | 15.8      |
| SprocketType                                  | Standard  |
| BEAArticleNumber                              | 103380025 |
| ISOstandardSize2                              | ISO 606   |
| brandType(extraAttributeForNeutralIdentifier) | Extended  |
| Merk                                          | Neutral   |
| Materiaal                                     | C45       |
| Spoed (inch)                                  | 1"        |
| Spoed (mm)                                    | 25.4      |
| Boring diameter (mm)                          |           |
| Geharde tanden                                | Nee       |
| Gewicht (kg)                                  | 18.99     |

# Beschrijving

16B Triplex Z 25, Standard Neutral Sprockets

# Product URL

<https://aandrijftechniek.nl/product/16b325-neutral/>