


## 20B224 Neutral

SKU: 200KWD2012Z24

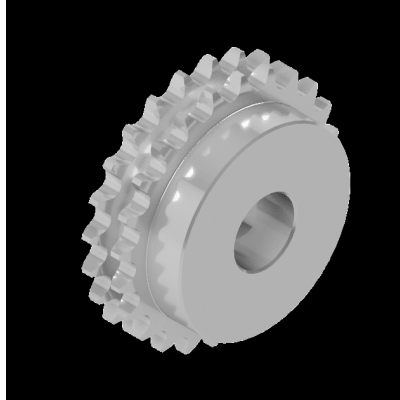

### Specificaties

<b>Kettingsontwerp</b>	Duplex
<b>Oppervlaktebehandeling</b>	No
<b>Materiaal</b>	C45
<b>Spoed (inch)</b>	1"1/4
<b>Spoed (mm)</b>	31.75
<b>ISO-standaardmaat</b>	20B
<b>designation</b>	20B224
<b>Boring diameter (mm)</b>	
<b>Eenheden</b>	pc
<b>numberOfTeethZ</b>	24
<b>toothWidthMM</b>	54.6
<b>pilotBoreDiameterMM</b>	30
<b>pitchCircleDiameterMM</b>	243.23
<b>tipCircleDiameterMM</b>	258.3
<b>Geharde tanden</b>	Nee
<b>Gewicht (kg)</b>	19.79
<b>weldedHub</b>	Nee
<b>taperBushSize</b>	
<b>hubDiamDnMM</b>	140
<b>lengthInclHubLnMM</b>	80

<b>toothWidthb1MM</b>	18.2
<b>SprocketType</b>	Standard
<b>BEAArticleNumber</b>	102400024
<b>ISOstandardSize2</b>	ISO 606
<b>brandType(extraAttributeForNeutralIdentifier)</b>	Extended
<b>Merk</b>	Neutral
<b>Materiaal</b>	C45
<b>Spoed (inch)</b>	1"1/4
<b>Spoed (mm)</b>	31.75
<b>Boring diameter (mm)</b>	
<b>Geharde tanden</b>	Nee
<b>Gewicht (kg)</b>	19.79

## Beschrijving

20B Duplex Z 24, Standard Neutral Sprockets

## Product URL

<https://aandrijftechniek.nl/product/20b224-neutral/>