


## 20B250 Neutral

SKU: 200KWD2012Z50

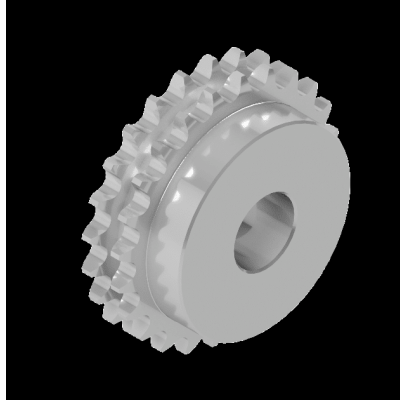

### Specificaties

|                        |        |
|------------------------|--------|
| Kettingsontwerp        | Duplex |
| Oppervlaktebehandeling | No     |
| Materiaal              | C45    |
| Spoed (inch)           | 1"1/4  |
| Spoed (mm)             | 31.75  |
| ISO-standaardmaat      | 20B    |
| designation            | 20B250 |
| Boring diameter (mm)   |        |
| Eenheden               | pc     |
| numberOfTeethZ         | 50     |
| toothWidthMM           | 54.6   |
| pilotBoreDiameterMM    | 30     |
| pitchCircleDiameterMM  | 505.65 |
| tipCircleDiameterMM    | 521.6  |
| Geharde tanden         | Nee    |
| Gewicht (kg)           | 87.08  |
| weldedHub              | Ja     |
| taperBushSize          |        |
| hubDiamDnMM            | 160    |
| lengthInclHubLnMM      | 101    |

|                                               |           |
|-----------------------------------------------|-----------|
| toothWidthb1MM                                | 18.2      |
| SprocketType                                  | Standard  |
| BEAArticleNumber                              | 102400050 |
| ISOstandardSize2                              | ISO 606   |
| brandType(extraAttributeForNeutralIdentifier) | Extended  |
| Merk                                          | Neutral   |
| Materiaal                                     | C45       |
| Spoed (inch)                                  | 1"1/4     |
| Spoed (mm)                                    | 31.75     |
| Boring diameter (mm)                          |           |
| Geharde tanden                                | Nee       |
| Gewicht (kg)                                  | 87.08     |

# Beschrijving

20B Duplex Z 50, Standard Neutral Sprockets

# Product URL

<https://aandrijftechniek.nl/product/20b250-neutral/>