


## 20B336 Neutral

SKU: 200KWTR2012Z36

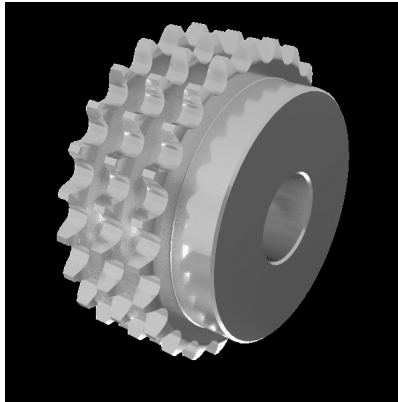

### Specificaties

|                        |         |
|------------------------|---------|
| Kettingsontwerp        | Triplex |
| Oppervlaktebehandeling | No      |
| Materiaal              | Steel   |
| Spoed (inch)           | 1"1/4   |
| Spoed (mm)             | 31.75   |
| ISO-standaardmaat      | 20B     |
| designation            | 20B336  |
| Boring diameter (mm)   |         |
| Eenheden               | pc      |
| numberOfTeethZ         | 36      |
| toothWidthMM           | 91      |
| pilotBoreDiameterMM    | 30      |
| pitchCircleDiameterMM  | 364.3   |
| tipCircleDiameterMM    | 379.2   |
| Geharde tanden         | Nee     |
| Gewicht (kg)           | 69.66   |
| weldedHub              | Ja      |
| taperBushSize          |         |
| hubDiamDnMM            | 150     |
| lengthInclHubLnMM      | 115     |

|                                               |           |
|-----------------------------------------------|-----------|
| toothWidthb1MM                                | 18.2      |
| SprocketType                                  | Standard  |
| BEAArticleNumber                              | 103400036 |
| ISOstandardSize2                              | ISO 606   |
| brandType(extraAttributeForNeutralIdentifier) | Extended  |
| Merk                                          | Neutral   |
| Materiaal                                     | Steel     |
| Spoed (inch)                                  | 1"1/4     |
| Spoed (mm)                                    | 31.75     |
| Boring diameter (mm)                          |           |
| Geharde tanden                                | Nee       |
| Gewicht (kg)                                  | 69.66     |

# Beschrijving

20B Triplex Z 36, Standard Neutral Sprockets

# Product URL

<https://aandrijftechniek.nl/product/20b336-neutral/>