


20B338 Neutral

SKU: 200TGTR2012Z38

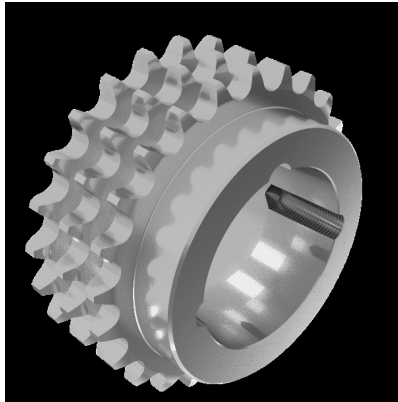

Specificaties

Kettingsontwerp	Triplex
Oppervlaktebehandeling	NO
Materiaal	EN-GJL-200
Spoed (inch)	1"1/4
Spoed (mm)	31.75
ISO-standaardmaat	20B
designation	20B338
Boring diameter (mm)	
Eenheden	pc
numberOfTeethZ	38
toothWidthMM	91
pitchCircleDiameterMM	384.49
tipCircleDiameterMM	399.4
Geharde tanden	Nee
Gewicht (kg)	28
weldedHub	Nee
execution	8
taperBushSize	3535
hubDiamDnMM	178
lengthInclHubLnMM	91

toothWidthb1MM	18.2
SprocketType	Standard Taper Bush
BEAArticleNumber	383400038
ISOstandardSize2	ISO 606
brandType(extraAttributeForNeutralIdentifier)	Extended
Merk	Neutral
Materiaal	EN-GJL-200
Spoed (inch)	1"1/4
Spoed (mm)	31.75
Boring diameter (mm)	
Geharde tanden	Nee
Gewicht (kg)	28

Beschrijving

20B Triplex Z 38, Standard Taper Bush 3535 Neutral Sprockets

Product URL

<https://aandrijftechniek.nl/product/20b338-neutral-2/>