


## 24B214 Neutral

SKU: 200KWD2416Z14

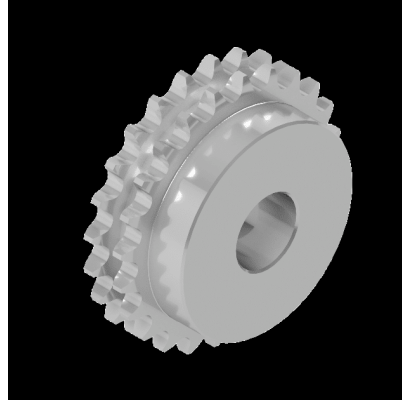

### Specificaties

<b>Kettingsontwerp</b>	Duplex
<b>Oppervlaktebehandeling</b>	No
<b>Materiaal</b>	C45
<b>Spoed (inch)</b>	1"1/2
<b>Spoed (mm)</b>	38.1
<b>ISO-standaardmaat</b>	24B
<b>designation</b>	24B214
<b>Boring diameter (mm)</b>	
<b>Eenheden</b>	pc
<b>numberOfTeethZ</b>	14
<b>toothWidthMM</b>	72
<b>pilotBoreDiameterMM</b>	25
<b>pitchCircleDiameterMM</b>	171.22
<b>tipCircleDiameterMM</b>	185
<b>Geharde tanden</b>	Nee
<b>Gewicht (kg)</b>	12.24
<b>weldedHub</b>	Nee
<b>taperBushSize</b>	
<b>hubDiamDnMM</b>	128
<b>lengthInclHubLnMM</b>	100

<b>toothWidthb1MM</b>	23.6
<b>SprocketType</b>	Standard
<b>BEAArticleNumber</b>	102420014
<b>ISOstandardSize2</b>	ISO 606
<b>brandType(extraAttributeForNeutralIdentifier)</b>	Extended
<b>Merk</b>	Neutral
<b>Materiaal</b>	C45
<b>Spoed (inch)</b>	1"1/2
<b>Spoed (mm)</b>	38.1
<b>Boring diameter (mm)</b>	
<b>Geharde tanden</b>	Nee
<b>Gewicht (kg)</b>	12.24

## Beschrijving

24B Duplex Z 14, Standard Neutral Sprockets

## Product URL

<https://aandrijftechniek.nl/product/24b214-neutral/>