


24B318 Neutral

SKU: 200KWTR2416Z18

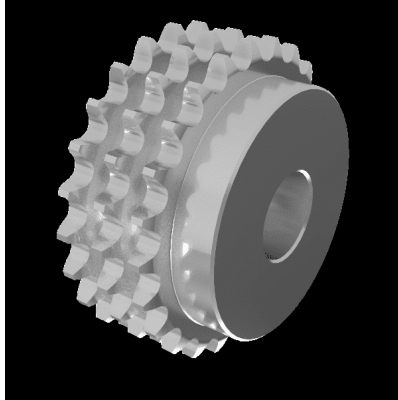

Specificaties

Kettingsontwerp	Triplex
Oppervlaktebehandeling	No
Materiaal	C45
Spoed (inch)	1"1/2
Spoed (mm)	38.1
ISO-standaardmaat	24B
designation	24B318
Boring diameter (mm)	
Eenheden	pc
numberOfTeethZ	18
toothWidthMM	120.3
pilotBoreDiameterMM	30
pitchCircleDiameterMM	219.42
tipCircleDiameterMM	233
Geharde tanden	Nee
Gewicht (kg)	32.12
weldedHub	Nee
taperBushSize	
hubDiamDnMM	160
lengthInclHubLnMM	150

toothWidthb1MM	23.6
SprocketType	Standard
BEAArticleNumber	103420018
ISOstandardSize2	ISO 606
brandType(extraAttributeForNeutralIdentifier)	Extended
Merk	Neutral
Materiaal	C45
Spoed (inch)	1"1/2
Spoed (mm)	38.1
Boring diameter (mm)	
Geharde tanden	Nee
Gewicht (kg)	32.12

Beschrijving

24B Triplex Z 18, Standard Neutral Sprockets

Product URL

<https://aandrijftechniek.nl/product/24b318-neutral/>