


24B322 Neutral

SKU: 200KWTR2416Z22

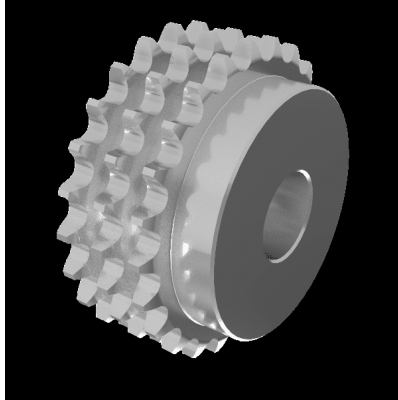

Specificaties

Kettingsontwerp	Triplex
Oppervlaktebehandeling	No
Materiaal	C45
Spoed (inch)	1"1/2
Spoed (mm)	38.1
ISO-standaardmaat	24B
designation	24B322
Boring diameter (mm)	
Eenheden	pc
numberOfTeethZ	22
toothWidthMM	120.3
pilotBoreDiameterMM	40
pitchCircleDiameterMM	267.73
tipCircleDiameterMM	282.5
Geharde tanden	Nee
Gewicht (kg)	47.25
weldedHub	Nee
taperBushSize	
hubDiamDnMM	160
lengthInclHubLnMM	150

toothWidthb1MM	23.6
SprocketType	Standard
BEAArticleNumber	103420022
ISOstandardSize2	ISO 606
brandType(extraAttributeForNeutralIdentifier)	Extended
Merk	Neutral
Materiaal	C45
Spoed (inch)	1"1/2
Spoed (mm)	38.1
Boring diameter (mm)	
Geharde tanden	Nee
Gewicht (kg)	47.25

Beschrijving

24B Triplex Z 22, Standard Neutral Sprockets

Product URL

<https://aandrijftechniek.nl/product/24b322-neutral/>