


24B338 Neutral

SKU: 200KWTR2416Z38

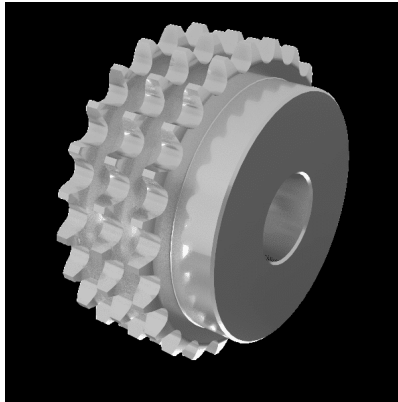

Specificaties

Kettingsontwerp	Triplex
Oppervlaktebehandeling	No
Materiaal	Steel
Spoed (inch)	1"1/2
Spoed (mm)	38.1
ISO-standaardmaat	24B
designation	24B338
Boring diameter (mm)	
Eenheden	pc
numberOfTeethZ	38
toothWidthMM	120.3
pilotBoreDiameterMM	40
pitchCircleDiameterMM	461.39
tipCircleDiameterMM	476.5
Geharde tanden	Nee
Gewicht (kg)	145.28
weldedHub	Ja
taperBushSize	
hubDiamDnMM	160
lengthInclHubLnMM	150

toothWidthb1MM	23.6
SprocketType	Standard
BEAArticleNumber	103420038
ISOstandardSize2	ISO 606
brandType(extraAttributeForNeutralIdentifier)	Extended
Merk	Neutral
Materiaal	Steel
Spoed (inch)	1"1/2
Spoed (mm)	38.1
Boring diameter (mm)	
Geharde tanden	Nee
Gewicht (kg)	145.28

Beschrijving

24B Triplex Z 38, Standard Neutral Sprockets

Product URL

<https://aandrijftechniek.nl/product/24b338-neutral/>