


24B350 Neutral

SKU: 200KWTR2416Z50

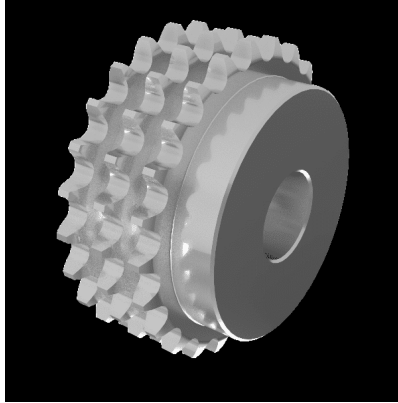

Specificaties

| | |
|-------------------------------|---------|
| Kettingsontwerp | Triplex |
| Oppervlaktebehandeling | No |
| Materiaal | Steel |
| Spoed (inch) | 1"1/2 |
| Spoed (mm) | 38.1 |
| ISO-standaardmaat | 24B |
| designation | 24B350 |
| Boring diameter (mm) | |
| Eenheden | pc |
| numberOfTeethZ | 50 |
| toothWidthMM | 120.3 |
| pilotBoreDiameterMM | 40 |
| pitchCircleDiameterMM | 606.78 |
| tipCircleDiameterMM | 622.5 |
| Geharde tanden | Nee |
| Gewicht (kg) | 258.81 |
| weldedHub | Ja |
| taperBushSize | |
| hubDiamDnMM | 200 |
| lengthInclHubLnMM | 153 |

| | |
|--|-----------|
| toothWidthb1MM | 23.6 |
| SprocketType | Standard |
| BEAArticleNumber | 103420050 |
| ISOstandardSize2 | ISO 606 |
| brandType(extraAttributeForNeutralIdentifier) | Extended |
| Merk | Neutral |
| Materiaal | Steel |
| Spoed (inch) | 1"1/2 |
| Spoed (mm) | 38.1 |
| Boring diameter (mm) | |
| Geharde tanden | Nee |
| Gewicht (kg) | 258.81 |

Beschrijving

24B Triplex Z 50, Standard Neutral Sprockets

Product URL

<https://aandrijftechniek.nl/product/24b350-neutral/>