


28B250 Neutral

SKU: 200KWD2819Z50

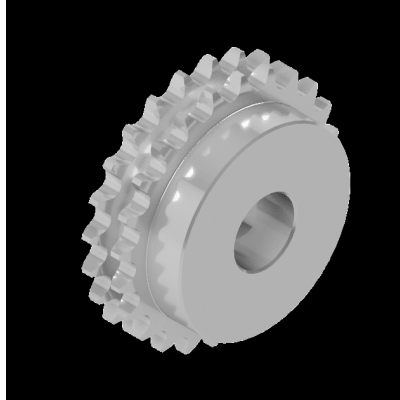

Specificaties

| | |
|-------------------------------|--------|
| Kettingsontwerp | Duplex |
| Oppervlaktebehandeling | No |
| Materiaal | Steel |
| Spoed (inch) | 1"3/4 |
| Spoed (mm) | 44.45 |
| ISO-standaardmaat | 28B |
| designation | 28B250 |
| Boring diameter (mm) | |
| Eenheden | pc |
| numberOfTeethZ | 50 |
| toothWidthMM | 88.4 |
| pilotBoreDiameterMM | 40 |
| pitchCircleDiameterMM | 707.91 |
| tipCircleDiameterMM | 726 |
| Geharde tanden | Nee |
| Gewicht (kg) | 267.99 |
| weldedHub | Ja |
| taperBushSize | |
| hubDiamDnMM | 200 |
| lengthInclHubLnMM | 150 |

| | |
|--|-----------|
| toothWidthb1MM | 28.8 |
| SprocketType | Standard |
| BEAArticleNumber | 102440050 |
| ISOstandardSize2 | ISO 606 |
| brandType(extraAttributeForNeutralIdentifier) | Extended |
| Merk | Neutral |
| Materiaal | Steel |
| Spoed (inch) | 1"3/4 |
| Spoed (mm) | 44.45 |
| Boring diameter (mm) | |
| Geharde tanden | Nee |
| Gewicht (kg) | 267.99 |

Beschrijving

28B Duplex Z 50, Standard Neutral Sprockets

Product URL

<https://aandrijftechniek.nl/product/28b250-neutral/>