


28B316 Neutral

SKU: 200KWTR2819Z16

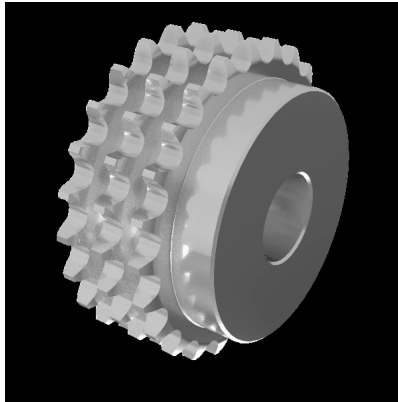

Specificaties

Kettingsontwerp	Triplex
Oppervlaktebehandeling	No
Materiaal	C45
Spoed (inch)	1"3/4
Spoed (mm)	44.45
ISO-standaardmaat	28B
designation	28B316
Boring diameter (mm)	
Eenheden	pc
numberOfTeethZ	16
toothWidthMM	148
pilotBoreDiameterMM	30
pitchCircleDiameterMM	227.84
tipCircleDiameterMM	246
Geharde tanden	Nee
Gewicht (kg)	40.44
weldedHub	Nee
taperBushSize	
hubDiamDnMM	160
lengthInclHubLnMM	180

toothWidthb1MM	28.8
SprocketType	Standard
BEAArticleNumber	103440016
ISOstandardSize2	ISO 606
brandType(extraAttributeForNeutralIdentifier)	Extended
Merk	Neutral
Materiaal	C45
Spoed (inch)	1"3/4
Spoed (mm)	44.45
Boring diameter (mm)	
Geharde tanden	Nee
Gewicht (kg)	40.44

Beschrijving

28B Triplex Z 16, Standard Neutral Sprockets

Product URL

<https://aandrijftechniek.nl/product/28b316-neutral/>