


## 32B250 Neutral

SKU: 200KWD3219Z50

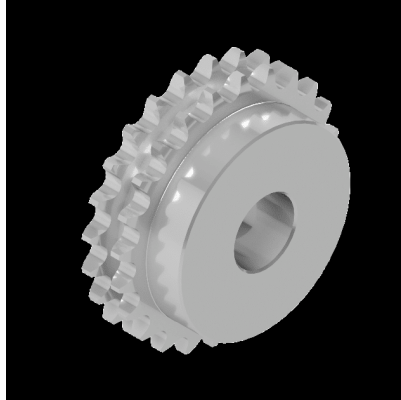

### Specificaties

<b>Kettingsontwerp</b>	Duplex
<b>Oppervlaktebehandeling</b>	No
<b>Materiaal</b>	Steel
<b>Spoed (inch)</b>	2"
<b>Spoed (mm)</b>	50.8
<b>ISO-standaardmaat</b>	32B
<b>designation</b>	32B250
<b>Boring diameter (mm)</b>	
<b>Eenheden</b>	pc
<b>numberOfTeethZ</b>	50
<b>toothWidthMM</b>	87.4
<b>pilotBoreDiameterMM</b>	40
<b>pitchCircleDiameterMM</b>	809.04
<b>tipCircleDiameterMM</b>	832
<b>Geharde tanden</b>	Nee
<b>Gewicht (kg)</b>	346.95
<b>weldedHub</b>	Ja
<b>taperBushSize</b>	
<b>hubDiamDnMM</b>	220
<b>lengthInclHubLnMM</b>	148

<b>toothWidthb1MM</b>	28.8
<b>SprocketType</b>	Standard
<b>BEAArticleNumber</b>	102460050
<b>ISOstandardSize2</b>	ISO 606
<b>brandType(extraAttributeForNeutralIdentifier)</b>	Extended
<b>Merk</b>	Neutral
<b>Materiaal</b>	Steel
<b>Spoed (inch)</b>	2"
<b>Spoed (mm)</b>	50.8
<b>Boring diameter (mm)</b>	
<b>Geharde tanden</b>	Nee
<b>Gewicht (kg)</b>	346.95

## Beschrijving

32B Duplex Z 50, Standard Neutral Sprockets

## Product URL

<https://aandrijftechniek.nl/product/32b250-neutral/>