


LL PU AT10 75 (100M) STEEL GATES SYNCHRO-POWER??

Roll Stock Open end timing belts PU GATES

SKU: 7GA1075ST

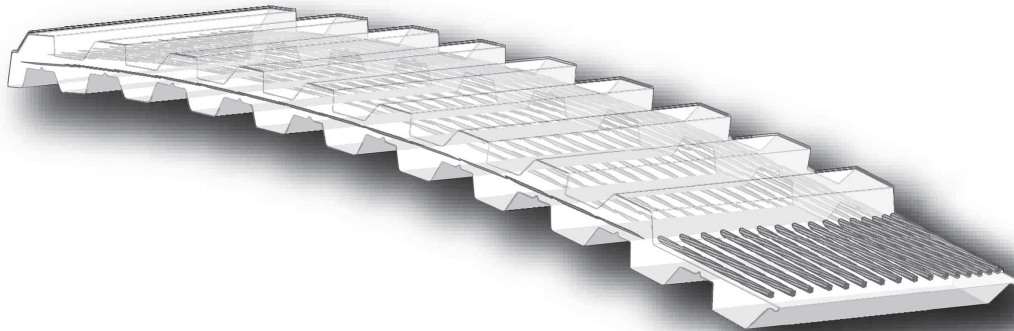

Specificaties

Gewicht (kg/m)	0.29
Spoed (mm)	10
Hoogte riem (mm)	4.5
Breedte riem (mm)	75
Materiaal riem	PU
Koormateriaal	Steel
Riemprofiel	AT10
toothWidthMM	2.5
Gewicht (kg)	0.29
Omschrijving (EN)	Belts are designed for a wide variety of loads, from micro-positioning to high-load and dynamic linear movements. Therefore this type of belt is especially fit for applications in conveyors, linear actuators, synchronous transport, assembly lines, and many more. Endless welded belts can be equipped with a wide variety of backings. Endless welded and open-end rolls in various sizes, constructions and tooth designs. Variety of tooth pitch, cord types, PU resins and coatings available.
Minimale temperatuur (??C)	-5
Maximale temperatuur (??C)	+70

EAN-code	5414465265006
Aangepaste code	3926.9097.90
Status	Normal
oringColour	White
Land van herkomst	DE
Tandvorm	AT Design
sided	Single Sided
StatConductive	No
beltEnd	Open End
Merk	GATES
Gewicht (kg/m)	0.29
Spoed (mm)	10
Breedte riem (mm)	75
Materiaal riem	PU
Riemprofiel	AT10
Gewicht (kg)	0.29
Minimale temperatuur (??C)	-5
Maximale temperatuur (??C)	+70
Land van herkomst	DE

Beschrijving

LL PU AT10 75 (100M) STEEL GATES SYNCHRO-POWER?? Roll Stock Open end timing belts PU

Product URL

<https://aandrijftechniek.nl/product/ll-pu-at10-75-100m-steel-gates-synchro-power-roll-stock-open-end-timing-belts-pu-gates/>