


LL PU HTD 14M 115 (50M) ST NT GATES SYNCHRO-POWER??

Roll Stock Open end timing belts PU GATES

SKU: 7G2014115PU

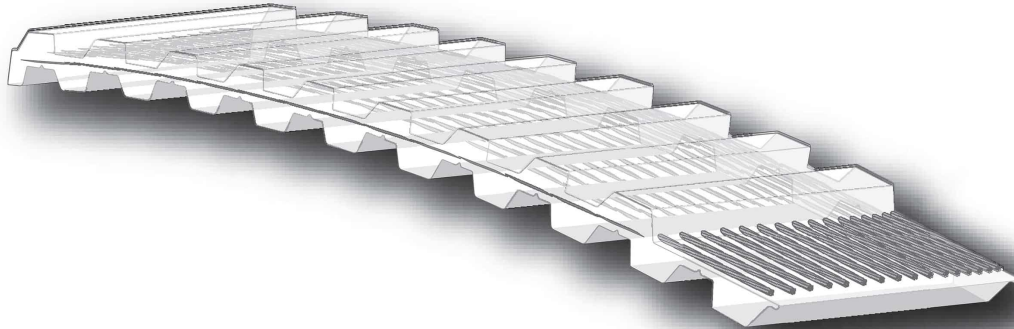

Specificaties

Gewicht (kg/m)	1.231
Spoed (mm)	14
Hoogte riem (mm)	50
Breedte riem (mm)	115
Materiaal riem	PU
Koordmateriaal	Steel
Riemprofiel	14M
toothWidthMM	6
Gewicht (kg)	1.231
Omschrijving (EN)	Belts are designed for a wide variety of loads, from micro-positioning to high-load and dynamic linear movements. Therefore this type of belt is especially fit for applications in conveyors, linear actuators, synchronous transport, assembly lines, and many more. Endless welded belts can be equipped with a wide variety of backings. Endless welded and open-end rolls in various sizes, constructions and tooth designs. Variety of tooth pitch, cord types, PU resins and coatings available.
Minimale temperatuur (??C)	-5
Maximale temperatuur (??C)	+70

EAN-code	5414465268441
Aangepaste code	3926.9097.90
Status	Normal
oringColour	White
Land van herkomst	DE
Tandvorm	HTD Design
sided	Single Sided
StatConductive	No
fabricMaterial	Nylon Teeth
beltEnd	Open End
Merk	GATES
Gewicht (kg/m)	1.231
Spoed (mm)	14
Breedte riem (mm)	115
Materiaal riem	PU
Riemprofiel	14M
Gewicht (kg)	1.231
Minimale temperatuur (??C)	-5
Maximale temperatuur (??C)	+70
Land van herkomst	DE

Beschrijving

LL PU HTD 14M 115 (50M) ST NT GATES SYNCHRO-POWER?? Roll Stock Open end timing belts PU

Product URL

<https://aandrijftechniek.nl/product/ll-pu-htd-14m-115-50m-st-nt-gates-synchro-power-roll-stock-open-end-timing-belts-pu-gates/>