


PU T2.5 420 20 GATES SYNCHRO-POWER?? Sleeves Endless timing belts PU GATES

SKU: 7G125420-20

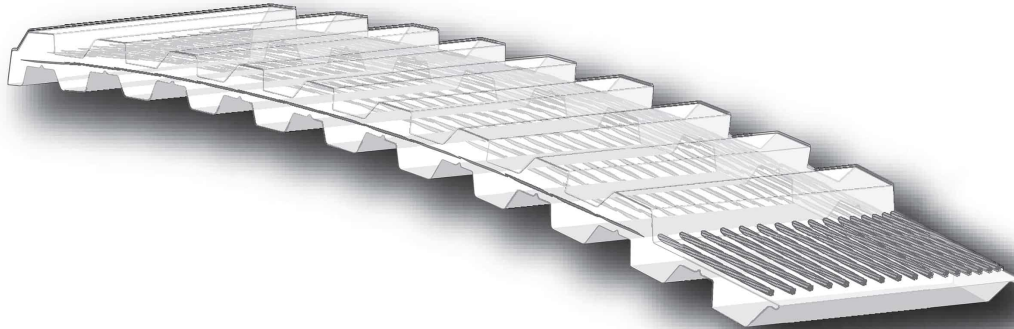

Specificaties

Spoed (mm)	2.5
Hoogte riem (mm)	1.3
Breedte riem (mm)	20
Spoorlengte (mm)	420
Materiaal riem	PU
Koordmateriaal	Steel
Riemprofiel	T2.5
numberOfTeethZ	168
toothWidthMM	0.7
Gewicht (kg)	0.012
Omschrijving (EN)	Belts are designed for light power transmission. Helically wound cords provide full tensile strength. Variety of tooth pitches available with steel or Aramid cords.
Minimale temperatuur (??C)	-5
Maximale temperatuur (??C)	+70
EAN-code	5414465508127
Aangepaste code	3926.9097.90
Status	Normal

oringColour	Blue
Land van herkomst	IE
beltBackSide	Smooth
Tandvorm	T Design
sided	Single Sided
StatConductive	No
beltEnd	Endless
Merk	GATES
Spoed (mm)	2.5
Breedte riem (mm)	20
Materiaal riem	PU
Riemprofiel	T2.5
Gewicht (kg)	0.012
Minimale temperatuur (??C)	-5
Maximale temperatuur (??C)	+70
Land van herkomst	IE

Beschrijving

PU T2.5 420 20 GATES SYNCHRO-POWER?? Sleeves Endless timing belts PU

Product URL

<https://aandrijftechniek.nl/product/pu-t2-5-420-20-gates-synchro-power-sleeves-endless-timing-belts-pu-gates/>