


06B316 Neutral

SKU: 200KWTR67Z16

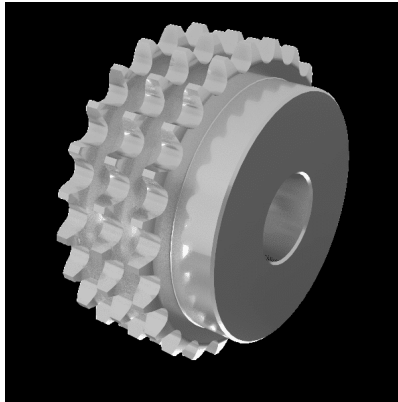

Specificaties

Kettingsontwerp	Triplex
Oppervlaktebehandeling	No
Materiaal	C45
Spoed (inch)	3/8"
Spoed (mm)	9.525
ISO-standaardmaat	06B
designation	06B316
Boring diameter (mm)	
Eenheden	pc
numberOfTeethZ	16
toothWidthMM	25.6
pilotBoreDiameterMM	12
pitchCircleDiameterMM	48.82
tipCircleDiameterMM	52.5
Geharde tanden	Nee
Gewicht (kg)	0.33
weldedHub	Nee
taperBushSize	
hubDiamDnMM	37
lengthInclHubLnMM	35

toothWidthb1MM	5.2
SprocketType	Standard
BEAArticleNumber	103330016
ISOstandardSize2	ISO 606
brandType(extraAttributeForNeutralIdentifier)	Extended
Merk	Neutral
Materiaal	C45
Spoed (inch)	3/8"
Spoed (mm)	9.525
Boring diameter (mm)	
Geharde tanden	Nee
Gewicht (kg)	0.33

Beschrijving

06B Triplex Z 16, Standard Neutral Sprockets

Product URL

<https://aandrijftechniek.nl/product/06b316-neutral/>