


10B308 Neutral

SKU: 200KWTR106Z8

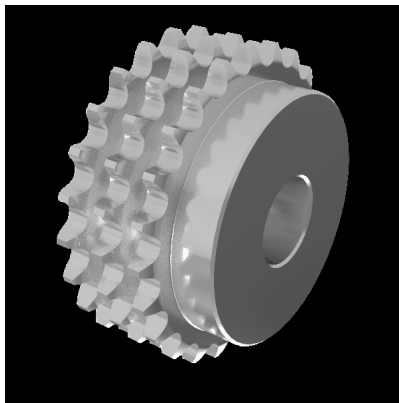

Specificaties

Kettingsontwerp	Triplex
Oppervlaktebehandeling	No
Materiaal	C45
Spoed (inch)	5/8"
Spoed (mm)	15.875
ISO-standaardmaat	10B
designation	10B308
Boring diameter (mm)	
Eenheden	pc
numberOfTeethZ	8
toothWidthMM	42.1
pilotBoreDiameterMM	12
pitchCircleDiameterMM	41.48
tipCircleDiameterMM	48.4
Geharde tanden	Nee
Gewicht (kg)	0.27
weldedHub	Nee
taperBushSize	
hubDiamDnMM	25
lengthInclHubLnMM	55

toothWidthb1MM	9
SprocketType	Standard
BEAArticleNumber	103350008
ISOstandardSize2	ISO 606
brandType(extraAttributeForNeutralIdentifier)	Extended
Merk	Neutral
Materiaal	C45
Spoed (inch)	5/8"
Spoed (mm)	15.875
Boring diameter (mm)	
Geharde tanden	Nee
Gewicht (kg)	0.27

Beschrijving

10B Triplex Z 8, Standard Neutral Sprockets

Product URL

<https://aandrijftechniek.nl/product/10b308-neutral/>