


10B350 Neutral

SKU: 200KWTR106Z50

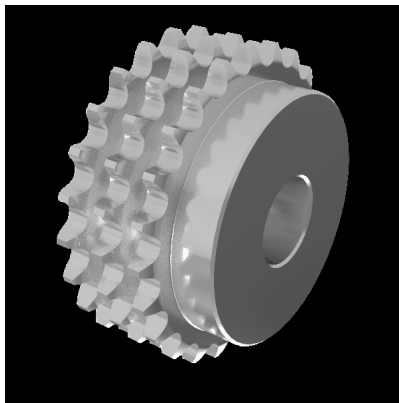

Specificaties

Kettingsontwerp	Triplex
Oppervlaktebehandeling	No
Materiaal	Steel
Spoed (inch)	5/8"
Spoed (mm)	15.875
ISO-standaardmaat	10B
designation	10B350
Boring diameter (mm)	
Eenheden	pc
numberOfTeethZ	50
toothWidthMM	42.1
pilotBoreDiameterMM	25
pitchCircleDiameterMM	252.82
tipCircleDiameterMM	261.2
Geharde tanden	Nee
Gewicht (kg)	18.83
weldedHub	Ja
taperBushSize	
hubDiamDnMM	136
lengthInclHubLnMM	74

toothWidthb1MM	9
SprocketType	Standard
BEAArticleNumber	103350050
ISOstandardSize2	ISO 606
brandType(extraAttributeForNeutralIdentifier)	Extended
Merk	Neutral
Materiaal	Steel
Spoed (inch)	5/8"
Spoed (mm)	15.875
Boring diameter (mm)	
Geharde tanden	Nee
Gewicht (kg)	18.83

Beschrijving

10B Triplex Z 50, Standard Neutral Sprockets

Product URL

<https://aandrijftechniek.nl/product/10b350-neutral/>