


16B322 Neutral

SKU: 200KWTR1611Z22

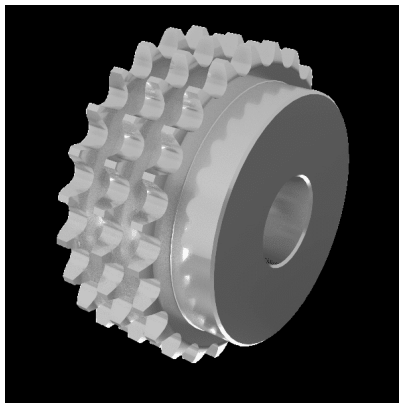

Specificaties

Kettingsontwerp	Triplex
Oppervlaktebehandeling	No
Materiaal	C45
Spoed (inch)	1"
Spoed (mm)	25.4
ISO-standaardmaat	16B
designation	16B322
Boring diameter (mm)	
Eenheden	pc
numberOfTeethZ	22
toothWidthMM	79.6
pilotBoreDiameterMM	25
pitchCircleDiameterMM	178.48
tipCircleDiameterMM	190.1
Geharde tanden	Nee
Gewicht (kg)	14.82
weldedHub	Nee
taperBushSize	
hubDiamDnMM	130
lengthInclHubLnMM	100

toothWidthb1MM	15.8
SprocketType	Standard
BEAArticleNumber	103380022
ISOstandardSize2	ISO 606
brandType(extraAttributeForNeutralIdentifier)	Extended
Merk	Neutral
Materiaal	C45
Spoed (inch)	1"
Spoed (mm)	25.4
Boring diameter (mm)	
Geharde tanden	Nee
Gewicht (kg)	14.82

Beschrijving

16B Triplex Z 22, Standard Neutral Sprockets

Product URL

<https://aandrijftechniek.nl/product/16b322-neutral/>