


20B338 Neutral

SKU: 200KWTR2012Z38

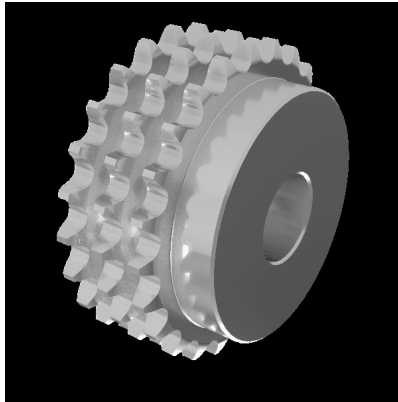

Specificaties

Kettingsontwerp	Triplex
Oppervlaktebehandeling	No
Materiaal	Steel
Spoed (inch)	1"1/4
Spoed (mm)	31.75
ISO-standaardmaat	20B
designation	20B338
Boring diameter (mm)	
Eenheden	pc
numberOfTeethZ	38
toothWidthMM	91
pilotBoreDiameterMM	30
pitchCircleDiameterMM	384.49
tipCircleDiameterMM	399.4
Geharde tanden	Nee
Gewicht (kg)	77.72
weldedHub	Ja
taperBushSize	
hubDiamDnMM	150
lengthInclHubLnMM	115

toothWidthb1MM	18.2
SprocketType	Standard
BEAArticleNumber	103400038
ISOstandardSize2	ISO 606
brandType(extraAttributeForNeutralIdentifier)	Extended
Merk	Neutral
Materiaal	Steel
Spoed (inch)	1"1/4
Spoed (mm)	31.75
Boring diameter (mm)	
Geharde tanden	Nee
Gewicht (kg)	77.72

Beschrijving

20B Triplex Z 38, Standard Neutral Sprockets

Product URL

<https://aandrijftechniek.nl/product/20b338-neutral/>