


24B230 Neutral

SKU: 200KWD2416Z30

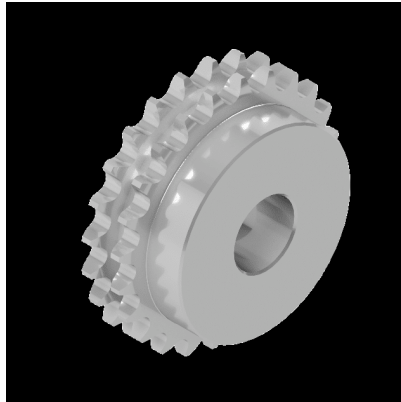

Specificaties

Kettingsontwerp	Duplex
Oppervlaktebehandeling	No
Materiaal	Steel
Spoed (inch)	1"1/2
Spoed (mm)	38.1
ISO-standaardmaat	24B
designation	24B230
Boring diameter (mm)	
Eenheden	pc
numberOfTeethZ	30
toothWidthMM	72
pilotBoreDiameterMM	30
pitchCircleDiameterMM	364.5
tipCircleDiameterMM	379.5
Geharde tanden	Nee
Gewicht (kg)	55.88
weldedHub	Ja
taperBushSize	
hubDiamDnMM	160
lengthInclHubLnMM	100

toothWidthb1MM	23.6
SprocketType	Standard
BEAArticleNumber	102420030
ISOstandardSize2	ISO 606
brandType(extraAttributeForNeutralIdentifier)	Extended
Merk	Neutral
Materiaal	Steel
Spoed (inch)	1"1/2
Spoed (mm)	38.1
Boring diameter (mm)	
Geharde tanden	Nee
Gewicht (kg)	55.88

Beschrijving

24B Duplex Z 30, Standard Neutral Sprockets

Product URL

<https://aandrijftechniek.nl/product/24b230-neutral/>