


81013073 IWIS Ecoplus Roller chains IWIS

SKU: 9050008B-1

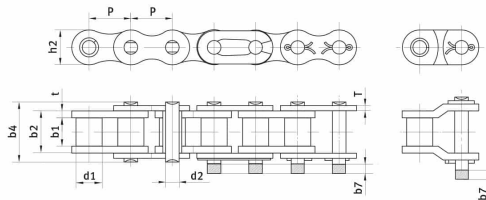

Specificaties

Kettingsontwerp	Simplex
Kettingsmering	eco1
Corrosiebestendig	Nee
Rechte zijplaten	Nee
Minimale breekbelasting volgens ISO (kN)	17.8
Gewicht (kg/m)	0.69
Materiaal	Steel
Spoed (inch)	0.5
Spoed (mm)	12.7
Maximale rollerdikte (D1) (mm)	8.51
Breedte tussen binnenplaten (mm)	7.75
Maximale pennendiameter (D2) (mm)	4.45
Breedte over pennen (B) (mm)	17

Maximale hoogte binnenplaat (H2) (mm)	11.81
Onderhoudsvrij	Nee
ISO-standaardmaat	08B
ISO-standaard	ISO 606 BS
Lageroppervlakte (cm??)	0.5
Eenheden	m
Omschrijving (EN)	ecoplus is the iwis economy brand for light-duty applications with low performance requirements. All ecoplus roller chains are intended for universal use and are therefore lubricated with only one light corrosion protection oil. Ecoplus Highlights - All ecoplus chains are pre-stretched with >30% breaking force following assembly. - ecoplus standard chains possess especially high breaking strength thanks to special ecoplus pins with high core hardness. - Case hardened bushes and rollers - Links plates are heat-treated and black oxidised - The initial lubrication ECO-1 is an anti-corrosion mineral oil-based lubricant
Dikte (t) (mm)	1.6
Merk	IWIS
Gewicht (kg/m)	0.69
Materiaal	Steel
Spoed (inch)	0.5
Spoed (mm)	12.7
Dikte (t) (mm)	1.6

Beschrijving

81013073 IWIS Roller chains

Product URL

<https://aandrijftechniek.nl/product/81013073-iwis-roller-chains-iwis/>